

526,889

Rec'd PCT/PTO

04 MAR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/022369 A1

(51) International Patent Classification⁷: **B60J 10/00**,
10/08

(21) International Application Number:
PCT/JP2003/011266

(22) International Filing Date:
3 September 2003 (03.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-260477 5 September 2002 (05.09.2002) JP

(72) Inventors; and
(75) Inventors/Applicants (for US only): **YAMASHITA, Takashi** [JP/JP]; c/o Nishikawa Rubber Co., Ltd., 2-8, Misawa-machi 2-chome, Nishi-ku, Hiroshima-shi, Hiroshima 733-8510 (JP). **OGAWA, Takashi** [JP/JP]; c/o Kabushiki Kaisha Honda Gijutsu Kenkyusho, 4-1, Chuo 1-chome, Wako-shi, Saitama 351-0193 (JP).

(74) Agents: **OGURI, shohei** et al.; Eikoh Patent Office, 28th Floor, ARK Mori Building, 12-32, Akasaka 1-chome, Minato-ku, Tokyo 107-6028 (JP).


(81) Designated States (national): CA, CN, MX, US.

Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicants (for all designated States except US): **NISHIKAWA RUBBER CO., LTD.** [JP/JP]; 2-8, Misawa-machi 2-chome, Nishi-ku, Hiroshima-shi, Hiroshima 733-8510 (JP). **HONDA GIKEN KOGYO KABUSHIKI KAISHA** [JP/JP]; 1-1, Minami-Aoyama 2-chome, Minato-ku, Tokyo 107-8556 (JP).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ATTACHMENT STRUCTURE FOR A WEATHER STRIP.

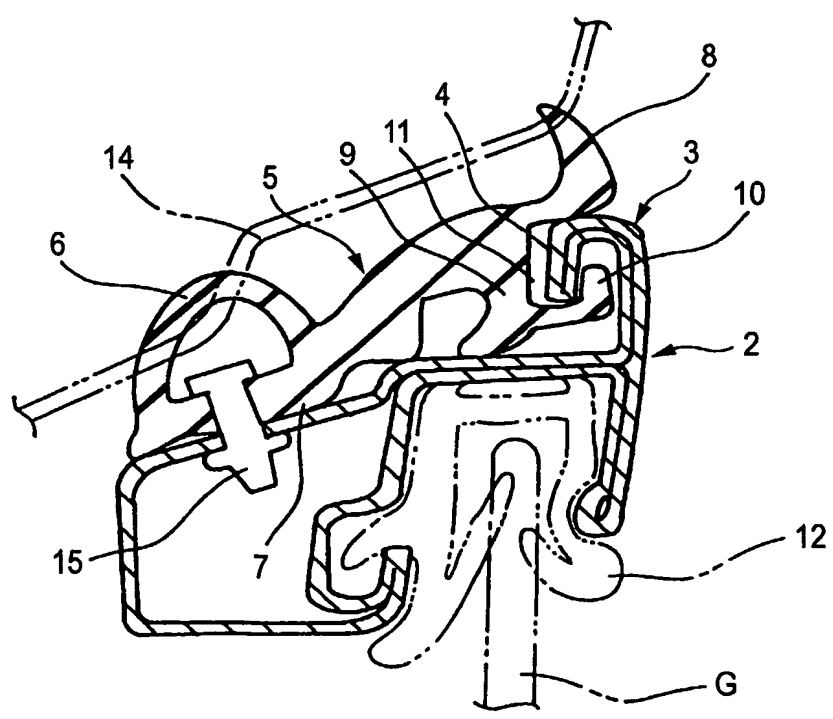

(57) Abstract: A structure of attaching a weather strip (5) includes a roll sash(2) of a sash door (1), and a weather strip (5) attached to an outer circumferential end face of the roll sash (2), a hollow seal portion (6) on the vehicle interior side and a seal lip portion (8) on the vehicle exterior side of the weather strip (5) formed integrated with each other into one body, the hollow seal portion (6) and the seal lip portion (8) coming into elastic contact with a vehicle body (14) to seal a portion between the sash door (1) and the vehicle body (14).

WO 2004/022369 A1

DESCRIPTION

ATTACHMENT STRUCTURE FOR A WEATHER STRIP

5 [Technical Field]

The present invention relates to a structure of attaching a weather strip to a roll sash of a sash door of an automobile, whereby the weather strip is attached to the roll sash and comes into elastic contact with the automobile body so as to seal a portion between the sash door and the automobile body.

[Background Art]

Concerning the weather strip, which is attached to the roll sash 20 of the sash door 1 of an automobile, for sealing a portion between the roll sash 20 and the automobile body 14 when the weather strip comes into elastic contact with the automobile body 14, there is provided a weather strip shown in Fig. 3. Fig. 3 is a sectional view taken on line A - A in Fig. 1.

A structure of attaching the above conventional weather strip includes: a roll sash 20, on the vehicle interior side and the vehicle exterior side of which the recess portions 21, 22 are respectively formed being integrated with the roll sash 20 into one body; and a

weather strip 24 in which the hollow seal portion 25 and the seal lip portion 26 are integrally formed. The base portion 27 of the hollow seal portion 25 of the weather strip 24 is fixed into the recess portion 21 on the vehicle interior side, and the base portion 28 on the seal lip portion 26 side is fixed into the recess portion 22 on the vehicle exterior side. In this way, the weather strip 24 is attached to the roll sash 20.

This structure of attaching the weather strip is advantageous in that the weather strip 24 can be strongly incorporated into the roll sash 20 because the weather strip 24 is attached via the two recess portions 21, 22.

However, in the conventional structure of attaching the weather strip, the following problems may be encountered. It is necessary to form the two recess portions 21, 22 in the roll sash 20. Accordingly, machining of the roll sash 20 is complicated.

The roll sash 20 is formed by the method of roll forming in which sheet metal is made to pass in a rolling machine a plurality of times. Therefore, in order to form the recess portions 21, 22, the profiles of which are complicated, having a plurality of protruding portions 23, a large number of man-hours are required.

Further, according to the conventional structure of attaching the weather strip, the base portion 27 of the

hollow seal portion 25 of the weather strip 24 and the base portion 28 of the seal lip portion 26 must be respectively pushed into the recess portions 21, 22 so that they can be fixed into the recess portions 21, 22. Therefore, a large number of man-hours are required in the process of attaching work.

[Disclosure of Invention]

It is an object of the present invention to provide a structure of attaching a weather strip characterized in that: a roll sash can be easily formed; and the weather strip can be easily attached to the roll sash.

In order to accomplish the above object, the present invention described in aspect 1 provides a structure of attaching a weather strip including: a roll sash (2) of a sash door (1); and a weather strip (5) attached to an outer circumferential end face of the roll sash (2), a hollow seal portion (6) on the vehicle interior side and a seal lip portion (8) on the vehicle exterior side of the weather strip being formed integrated with each other into one body, the hollow seal portion (6) and the seal lip portion (8) coming into elastic contact with a vehicle body (14) so as to seal a portion between the sash door (1) and the vehicle body (14), wherein one hook portion (3) is vertically arranged only on the vehicle exterior side of

the roll sash (2), a protrusion (10) engaging with the hook portion (3) is formed in a base portion (9) of the seal lip portion (8) without forming a protruding portion on the vehicle interior side of the hook portion (3), and a base
5 portion (7) of the hollow seal portion (6) is fixed to the roll sash (2) by a clip (15).

The present invention described in aspect 2 provides a structure of attaching a weather strip according to aspect 1, wherein the hook portion (3) is formed into a protrusion
10 (4) directed downward by bending an upper end portion to the vehicle interior side and further by bending a forward end portion of the upper end portion downward, and the protrusion formed in the base portion (9) of the seal lip portion (8), which engages with the hook portion (3), is
15 directed upward and formed into an upward protrusion (10).

In this connection, reference numerals in the parentheses represent corresponding components shown in the drawings and the embodiment of the present invention described later.

20 According to the present invention, the weather strip is attached to the roll sash in such a manner that the hook portion, which is arranged on the vehicle exterior side of the roll sash, for example, the protrusion directed downward, and the protrusion, which is arranged in the base
25 portion of the seal lip, for example, the protrusion

directed upward are engaged with each other, and no protruding portion is arranged in a portion from the hook portion to the vehicle interior side, and further the base portion of the hollow seal portion is fixed by the clip.

5 Therefore, the roll sash can be easily formed and the weather strip can be easily attached to the roll sash.

As a means for attaching the weather strip to the roll sash, it is sufficient that only one hook portion is formed in the roll sash. In the conventional structure, it is
10 necessary to form a plurality of complicated protruding and recessed portions such as protruding portions for holding the base portions of the weather strip. However, according to the present invention, it is sufficient that only one protruding portion is formed. Therefore, the roll sash can
15 be easily formed by the method of roll forming.

In the case of attaching the weather strip to the roll sash of the present invention, the protrusion arranged in the base portion of the seal lip portion, for example, the protrusion directed upward is engaged with the hook portion
20 of the roll sash, for example, the protrusion directed downward, and at the same time, the hollow seal portion is fixed by the clip. Therefore, it is unnecessary that the weather strip is fitted to the roll sash being pushed into two recess portions like the conventional structure.
25 Therefore, the attaching work can be easily performed.

[Brief Description of Drawings]

Fig. 1 is a side view showing an external appearance of an automobile provided with the structure of attaching a weather strip.

Fig. 2 is a view showing the structure of attaching the weather strip of an embodiment of the present invention. Fig. 2 is a sectional view taken on line A - A in Fig. 1.

Fig. 3 is a view showing the structure of attaching the weather strip of a conventional example. Fig. 3 is a sectional view taken on line A - A in Fig. 1.

[Best Mode for Carrying Out the Invention]

Referring to Figs. 1 and 2, a structure of attaching a weather strip of the embodiment of the present invention will be explained below. Fig. 1 is a side view showing an external appearance of an automobile provided with the structure of attaching a weather strip, and Fig. 2 is a sectional view taken on line A - A in Fig. 1. Like reference characters are used to indicate like parts in the drawings of the conventional example and the embodiment of the present invention.

The structure of attaching the weather strip of the embodiment of the present invention includes: a roll sash 2

of the sash door 1; and a weather strip 5 attached to an upper end outer circumferential end face of the roll sash 2, in which the hollow seal portion 6 arranged on the vehicle interior side and the seal lip portion 8, the cross section of which is formed into a tongue-shape, arranged on the vehicle exterior side are integrally formed, wherein the hollow seal portion 6 and the seal lip portion 8 come into elastic contact with the vehicle body 14, so that a portion between the roll sash 2 and the vehicle body 14 can be sealed.

On the vehicle exterior side of the roll sash 2, there is provided only one hook portion 3 which is formed in the vertical direction in such a manner that an upper end portion is bent toward the interior side of the vehicle and further a forward end portion of the thus bent upper end portion is bent downward so as to form a protrusion 4 directed downward. In a portion from the position of the hook portion 3 to the vehicle interior side, no protrusion is formed for holding the base portion of the weather strip. Therefore, the upper end outer circumferential end face of the roll sash 2 is smooth except for the position where the hook portion 3 is arranged. In the base end portion 9 of the seal lip portion 8, there is provided a recess portion 11 into which the protrusion 4 is inserted. At the same time, the protrusion 10 directed upward to be

engaged with the protrusion 4 directed downward is formed, and the protrusion 4 directed downward and the protrusion 10 directed upward are engaged with each other. Further, the base portion 7 of the hollow seal portion 6 is fixed to the roll sash 2 by the clip 15.

In this connection, the glass-run 12 coming into elastic contact with door glass G is attached to the lower face of the roll sash 2.

According to the structure of attaching a weather strip of this embodiment, it is sufficient that only the hook portion 3 is formed as a means for attaching the weather strip 5 to the roll sash 2. According to the conventional structure of attaching a weather strip, it is necessary that a plurality of complicated protruding and recessed portions for holding the base portions of the weather strip are formed. However, in the embodiment of the present invention, it is sufficient that only one hook portion is formed. Therefore, the forming of the roll sash 2 can be easily performed. Further, the weather strip 5 can be attached to the roll sash 2 in such a manner that the protrusion 10, which is directed upward, arranged in the base portion of the seal lip portion 8 is engaged with the protrusion 4 directed downward of the roll sash 2 and that the base portion 7 of the hollow seal portion 6 is

fixed by the clip 15. Therefore, the weather strip 5 can be easily attached to the roll sash 2.

When the weather strip 5 is attached to the roll sash 2, the protrusion 4 directed downward of the roll sash 2 enters the recess portion 11 of the weather strip 5, and the protrusion 10 directed upward of the weather strip 5 enters the recess portion of the hook portion 3 of the roll sash 2. Therefore, in the same manner as that of the hollow seal portion 6, the seal lip portion 8 of the weather strip 5 can be stably and strongly attached to the roll sash 2.

In this connection, in the weather strip 5 of this embodiment of the present invention, the hollow seal portion 6 and the seal lip portion 8 are respectively arranged on the vehicle interior side and the vehicle exterior side considerably distant from each other. However, the present embodiment can be applied to a weather strip in which a portion of connecting the hollow seal portion 6 with the seal lip portion 8 is made short so that both can be arranged close to each other.

[Industrial Applicability]

As described above, the weather strip described in the present invention is attached to the roll sash in such a manner that the hook portion, which is arranged on the

vehicle exterior side of the roll sash, for example, the protrusion directed downward, and the protrusion, which is arranged in the base portion of the seal lip, for example, the protrusion directed upward are engaged with each other, and further the base portion of the hollow seal portion is fixed by the clip. Therefore, the roll sash can be easily formed and the productivity can be enhanced. Further, the weather strip can be easily attached to the roll sash, and the attaching workability can be enhanced.

CLAIMS

1. A structure of attaching a weather strip comprising:
a roll sash of a sash door; and

5 a weather strip attached to an outer circumferential
end face of the roll sash, a hollow seal portion on the
vehicle interior side and a seal lip portion on the vehicle
exterior side of the weather strip being formed integrated
with each other into one body, the hollow seal portion and
10 the seal lip portion coming into elastic contact with a
vehicle body so as to seal a portion between the sash door
and the vehicle body, wherein

one hook portion is vertically arranged only on the
vehicle exterior side of the roll sash,

15 a protrusion engaging with the hook portion is formed
in a base portion of the seal lip portion without forming a
protruding portion on the vehicle interior side of the hook
portion, and

a base portion of the hollow seal portion is fixed to
20 the roll sash by a clip.

2. The structure of attaching a weather strip according to claim 1, wherein

the hook portion is formed into a protrusion directed downward by bending an upper end portion to the vehicle interior side and further by bending a forward end portion of the upper end portion downward, and

the protrusion formed in the base portion of the seal lip portion, which engages with the hook portion, is directed upward and formed into an upward protrusion.

10

FIG. 1

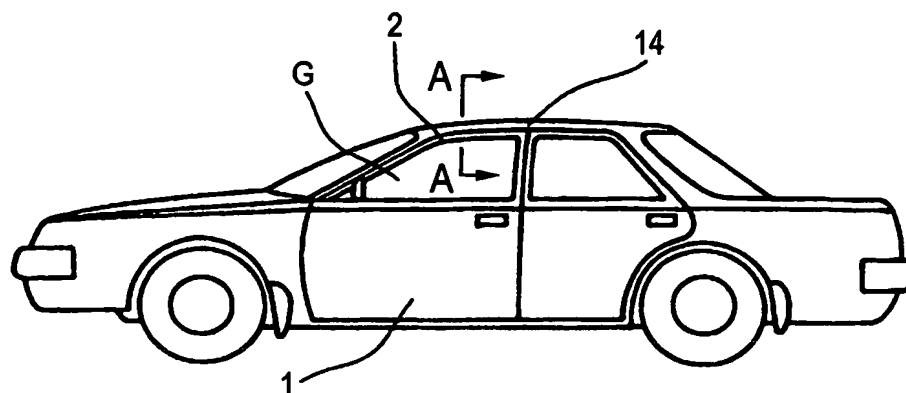


FIG. 2


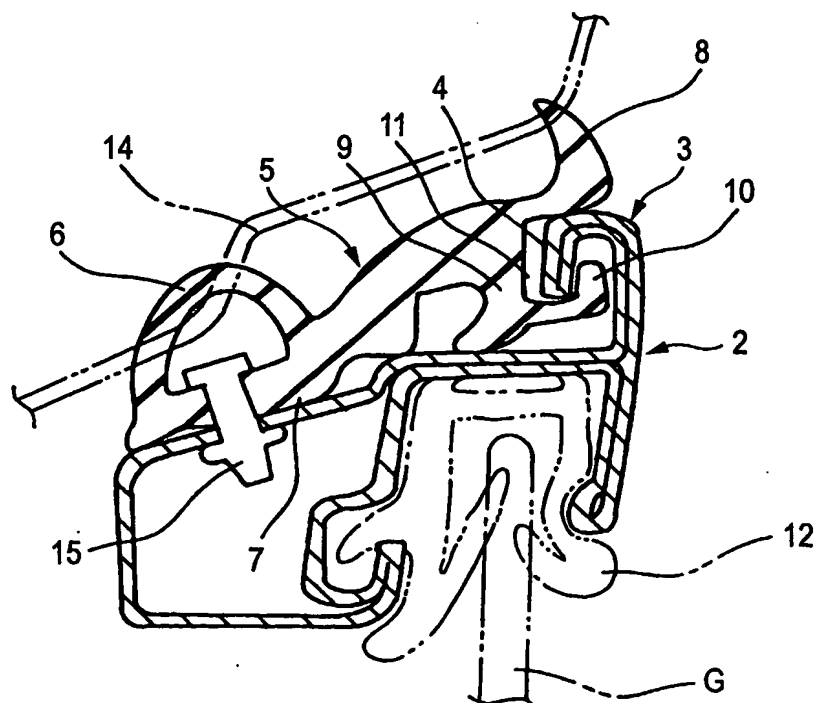


FIG. 3

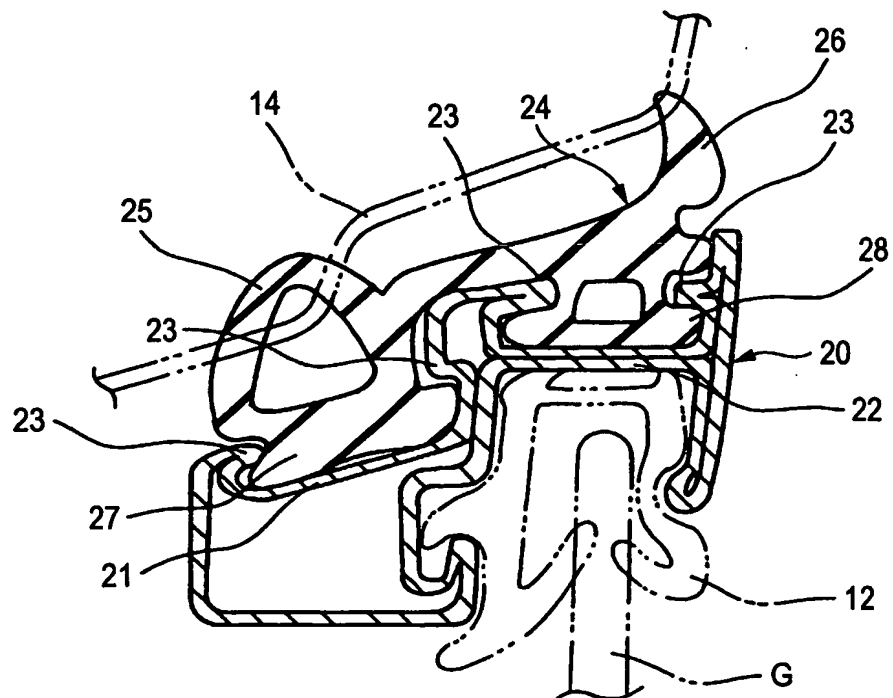

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/JP 03/11266

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60J10/00 B60J10/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B60J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 055 (M-1550), 28 January 1994 (1994-01-28) & JP 05 278465 A (KINUGAWA RUBBER IND CO LTD), 26 October 1993 (1993-10-26)	1
Y	abstract; figure 1 ---	2
Y	US 4 026 598 A (KOIKE SYOICHI) 31 May 1977 (1977-05-31) column 3, line 5 - line 16 figures 4A, 4B ---	2
Y	EP 0 788 913 A (DRAFTEX IND LTD) 13 August 1997 (1997-08-13) column 3, line 4 - line 12 column 3, line 25 - line 28 figure 3 --- -/--	1, 2

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 January 2004

Date of mailing of the international search report

05/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Verkerk, E

INTERNATIONAL SEARCH REPORT

International Publication No

PCT/JP 03/11266

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 09, 4 September 2002 (2002-09-04) & JP 2002 154338 A (TOYO TIRE & RUBBER CO LTD), 28 May 2002 (2002-05-28) abstract; figures 4,16 ---	1,2
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 13, 5 February 2001 (2001-02-05) & JP 2000 280751 A (NISHIKAWA RUBBER CO LTD), 10 October 2000 (2000-10-10) abstract; figure 3 -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/JP 03/11266

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 05278465	A	26-10-1993	NONE	
US 4026598	A	31-05-1977	JP 51065420 U DE 2551240 A1 GB 1522347 A	24-05-1976 20-05-1976 23-08-1978
EP 0788913	A	13-08-1997	GB 2309994 A DE 69608780 D1 DE 69608780 T2 EP 0788913 A1 ES 2146843 T3 US 6007140 A	13-08-1997 13-07-2000 15-02-2001 13-08-1997 16-08-2000 28-12-1999
JP 2002154338	A	28-05-2002	JP 2002154335 A JP 2002154336 A JP 2002154332 A JP 2002154455 A JP 2002154333 A JP 2002154337 A	28-05-2002 28-05-2002 28-05-2002 28-05-2002 28-05-2002 28-05-2002
JP 2000280751	A	10-10-2000	NONE	